Fitting for top-running wooden doors up to 100 kg (220 lbs.), with surface mounted running track. Optionally with soft and self closing mechanism. Wall or ceiling mounting.

Product highlights

Flexibility Ceiling mounting with customer-provided panelling or integrated clip-on panel in aluminium or wood

Productivity Retrofitting of all components through the provided assembly opening, prevents contamination during construction work

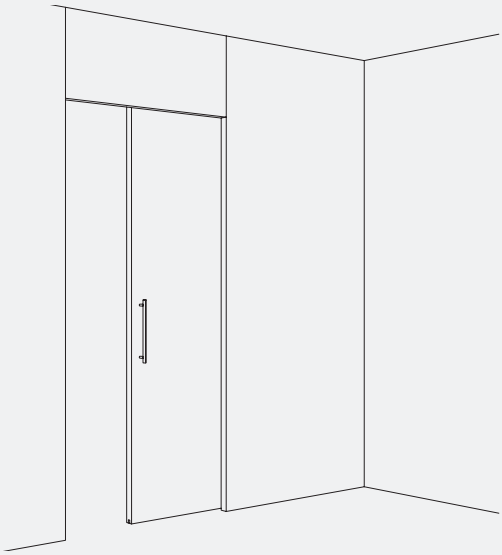

Technical specifications

Max.	100 kg (220 lbs.)
Max.	2700 mm (8'10 5/16'')
Max.	1600 mm (5'3'')
	30–80 mm (1 3/16'' to 3 5/32'')

Installation examples

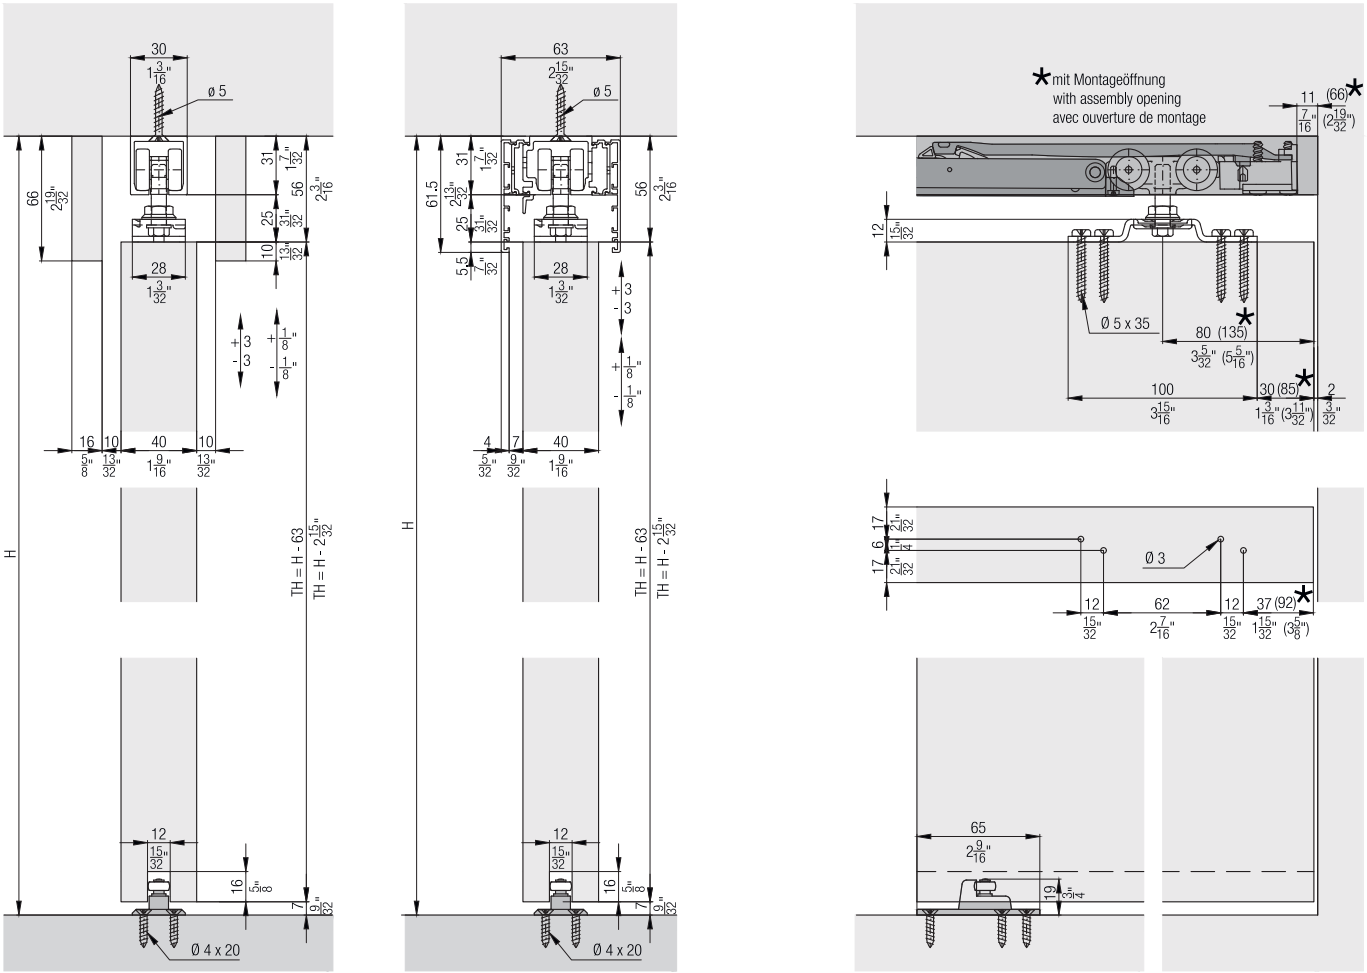

Set for ceiling or wall mounting, for 1 wooden door up to 100 kg (220 lbs.)

	No.
Hawa Porta/Divido 100 H/HC, for 1 door	057.3139.071
Hawa Porta 100 H/HC, black, for 1 door	057.3139.075

Set consisting of:

		057.3139.071	057.3139.075	No.
	Running gear, ball bearing, rollers plastic white	2	2	057.3114.071
	Stopper, with retention spring, plastic, gray	2		057.3073.072
	Suspension bolt, M8x32 mm, steel, zinc-plated	2	2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated	2	2	768.9005.101
	Support bracket, height and lateral adjustable, steel, zinc-plated	2	2	057.3129.101
	Pan head screw, 5x35 mm, steel, zinc-plated	8	8	766.6051.135
	Bottom guide, with roller, adjustable, plastic, anthracite	1	1	057.3120.071
	Countersunk head screw, 4x20 mm, steel, zinc-plated	4		766.5042.120
	Stopper, with retention spring, plastic, black		2	057.3073.076
	Countersunk head screw, 4x20 mm, steel, zinc-plated		4	600.0000.817

Set for ceiling or wall mounting, for 1 wooden door up to 100 kg (220 lbs.)

	No.
Hawa Porta 100 H, with running track, 2000 mm (6'6 3/4''), aluminum, anodized, for 1 door	057.3141.071

Set consisting of:

		mm (inch)	057.3141.071	No.
	Running gear, ball bearing, rollers plastic white		2	057.3114.071
	Stopper, with retention spring, plastic, gray		2	057.3073.072
	Suspension bolt, M8x32 mm, steel, zinc-plated		2	057.0123.104
	Hexagon locking nut, M8, steel, zinc-plated		2	768.9005.101
	Support bracket, height and lateral adjustable, steel, zinc-plated		2	057.3129.101
	Pan head screw, 5x35 mm, steel, zinc-plated		8	766.6051.135
	Bottom guide, with roller, adjustable, plastic, anthracite		1	057.3120.071
	Countersunk head screw, 4x20 mm, steel, zinc-plated		4	766.5042.120
	Track cleaner, plastic		1	057.3099.071
	Running track, aluminum, anodized, pre-drilled	2000 (6' 6 3/4 '')	1	057.3016.201

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

Running tracks

		mm (inch)	No.
	Running track, aluminum, pre-drilled	1700 (5' 6 15/16'')	057.3016.170
		2000 (6' 6 3/4 '')	057.3016.200
		2500 (8' 2 7/16'')	057.3016.250
		6000 (19' 8 7/32'')	057.3016.600
		cut to size	057.3016.990
	Running track, aluminum, anodized, pre-drilled	2000 (6' 6 3/4 '')	057.3016.201
		2500 (8' 2 7/16'')	057.3016.251
		6000 (19' 8 7/32'')	057.3016.601
		cut to size	057.3016.991
	Running track, with assembly opening, aluminum, anodized, pre-drilled	2500 (8' 2 7/16'')	057.3016.256
	Running track, aluminum, anodized, pre-drilled, with assembly opening	cut to size	057.3016.998
	Combi running track, aluminum, pre-drilled	1700 (5' 6 15/16'')	057.3048.170
		2000 (6' 6 3/4 '')	057.3048.200
		2500 (8' 2 7/16'')	057.3048.250
		3500 (11' 5 25/32'')	057.3048.350
		6000 (19' 8 7/32'')	057.3048.600
		cut to size	057.3048.990
	Combi running track, aluminum, black anodized, pre-drilled	2500 (8'2 7/16'')	057.3048.255
		3500 (11'5 25/32'')	057.3048.355
	Disposable cover to running track Hawa Porta 45/60/100, plastic, black	2000 (6'6 3/4'')	057.3098.001
		cut to size	057.3098.990

Assembly set

	No.
Assembly set Hawa Porta 60/100, 2000 mm (6'6 3/4")	057.3179.200
Assembly set Hawa Porta 60/100, 2500 mm (8'2 7/16'')	057.3179.250

Set consisting of:

		mm (inch)	057.3179.200	057.3179.250	No.
	Running track, aluminum, anodized, pre-drilled	2000 (6'6 3/4'')	1		057.3174.200
	Assembly pin, plastic, gray		9	11	057.0201.001
	Countersunk head screw, 5x40 mm, steel, zinc-plated		10	12	766.3054.140
	Running track, aluminum, anodized, pre-drilled	2500 (8'2 7/16'')		1	057.3174.250

Panels

		mm (inch)	No.
	Clip-on panel, aluminum, anodized	2500 (8'2 7/16'')	042.3004.250
		3500 (11' 5 25/32'')	042.3004.350
		6000 (19' 8 7/32'')	042.3004.600
		cut to size	042.3004.990
	Clip-on panel, aluminum, black anodized	2500 (8'2 7/16'')	042.3004.255
		3500 (11'5 25/32'')	042.3004.355

Clip-on components

		No.
	Clip component for wooden and aluminium panel, every 500 mm (1'7 11/16''), aluminium, pre-drilled	057.3117.001
	Clip component for wooden and aluminium panel, every 500 mm (1'7 11/16''), aluminium, black anodized, pre-drilled	057.3117.005

Soft close
For soft closing in opening and closing direction order 2 sets.

	No.
Soft close Hawa Porta 100, 61–100 kg (133–220 lbs.), 1 piece	042.3102.071
Soft close Hawa Porta 60, 10–60 kg (22–132 lbs.), 1 piece	042.3102.072

Set consisting of:

		042.3102.071	042.3102.072	No.
	Soft close, top running, 61–100 kg (133–220 lbs.), plastic	1		042.3106.071
	Trigger for soft close in buildings, zinc die casting	1	1	042.3105.001
	Screw set soft close	1	1	600.0000.566
	Soft close, top running, 10–60 kg (22–132 lbs.), plastic		1	042.3106.072

Cover for assembly opening

	No.
Cover cap to assembly opening, 1-piece set	042.3114.071

Set consisting of:

		042.3114.071	No.
	Cover cap assembly opening, plastic, gray	1	042.0172.001
	Screw set soft close	1	600.0000.566

Bracket set for wall mounting

	No.
Angle bracket for wall mounting, steel, zinc-plated, 10-piece set	057.3005.172

Set consisting of:

		057.3005.172	No.
	Wall mounting angle bracket, steel, zinc-plated	10	057.0169.101
	Countersunk head screw, M5x12 mm, steel, zinc-plated	10	762.5008.100
	Hexagon nut, M5, steel, zinc-plated	10	768.9025.100

Bottom guide set for wall mounting

		No.
	Set bottom guide for wall mounting, with roller	057.3128.171

Accessories

		No.
	Routing jig for assembly opening	042.3118.071
	Groove cutter to routing jig, Ø= 10 mm (13/32"), hard metal	600.0000.309
	Track cleaner, plastic	057.3099.071

Subject to technical modifications. Metric specifications are exact. Inches are approximate.

Assembly set/Wooden panel

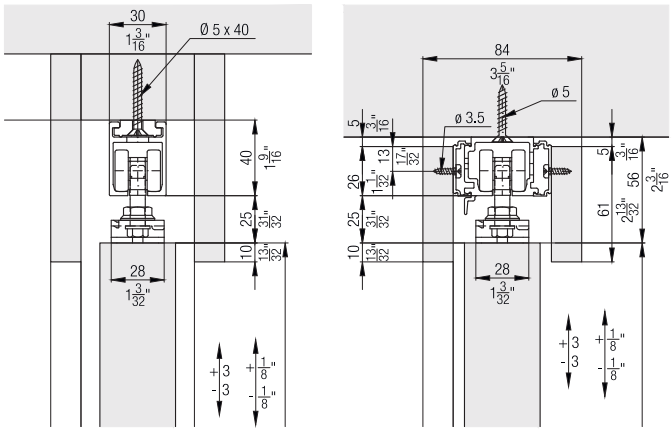

Optional: Wall mounting

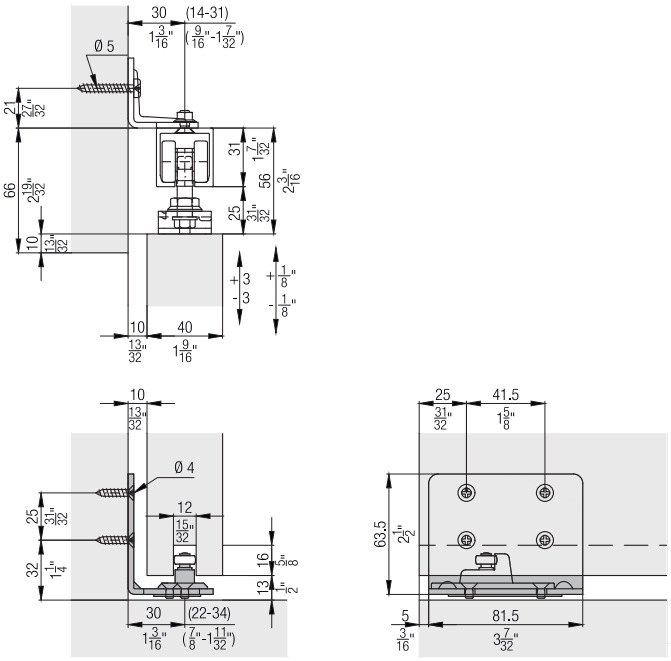

Soft close

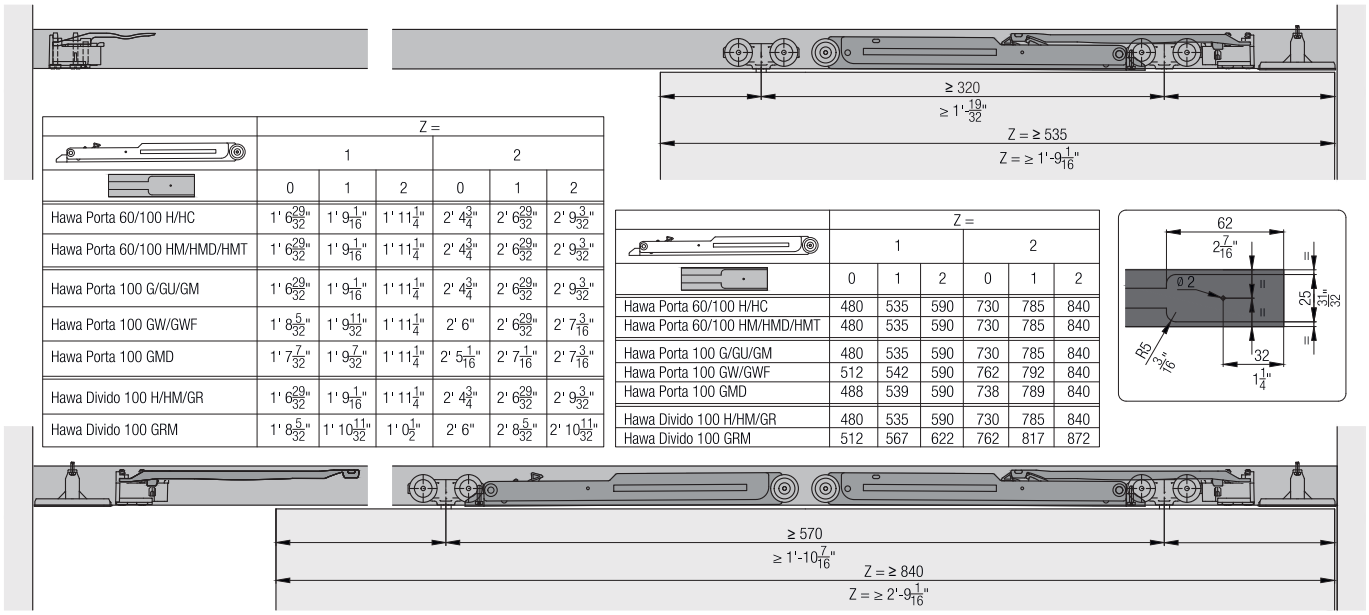

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/HC	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Porta 60/100 HM/HMD/HMT	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Porta 100 G/GU/GM	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Porta 100 GW/GWF	1' 8 5/32"	1' 9 11/32"	1' 11 1/4"	2' 6"	2' 6 29/32"	2' 7 3/16"
Hawa Porta 100 GMD	1' 7 7/32"	1' 9 7/32"	1' 11 1/4"	2' 5 1/16"	2' 7 1/16"	2' 7 3/16"
Hawa Divido 100 H/HM/GR	1' 6 29/32"	1' 9 1/16"	1' 11 1/4"	2' 4 3/4"	2' 6 29/32"	2' 9 3/32"
Hawa Divido 100 GRM	1' 8 5/32"	1' 10 11/32"	1' 0 1/2"	2' 6"	2' 8 5/32"	2' 10 11/32"

	Z =					
	1			2		
	0	1	2	0	1	2
Hawa Porta 60/100 H/HC	480	535	590	730	785	840
Hawa Porta 60/100 HM/HMD/HMT	480	535	590	730	785	840
Hawa Porta 100 G/GU/GM	480	535	590	730	785	840
Hawa Porta 100 GW/GWF	512	542	590	762	792	840
Hawa Porta 100 GMD	488	539	590	738	789	840
Hawa Divido 100 H/HM/GR	480	535	590	730	785	840
Hawa Divido 100 GRM	512	567	622	762	817	872

Accessories

– Lock solutions from page 374
– General accessories from page 383

Planning/execution

Further information about the product can be found on www.hawa.com.